

AIRCRAFT PARKING/
DOCKING CHART


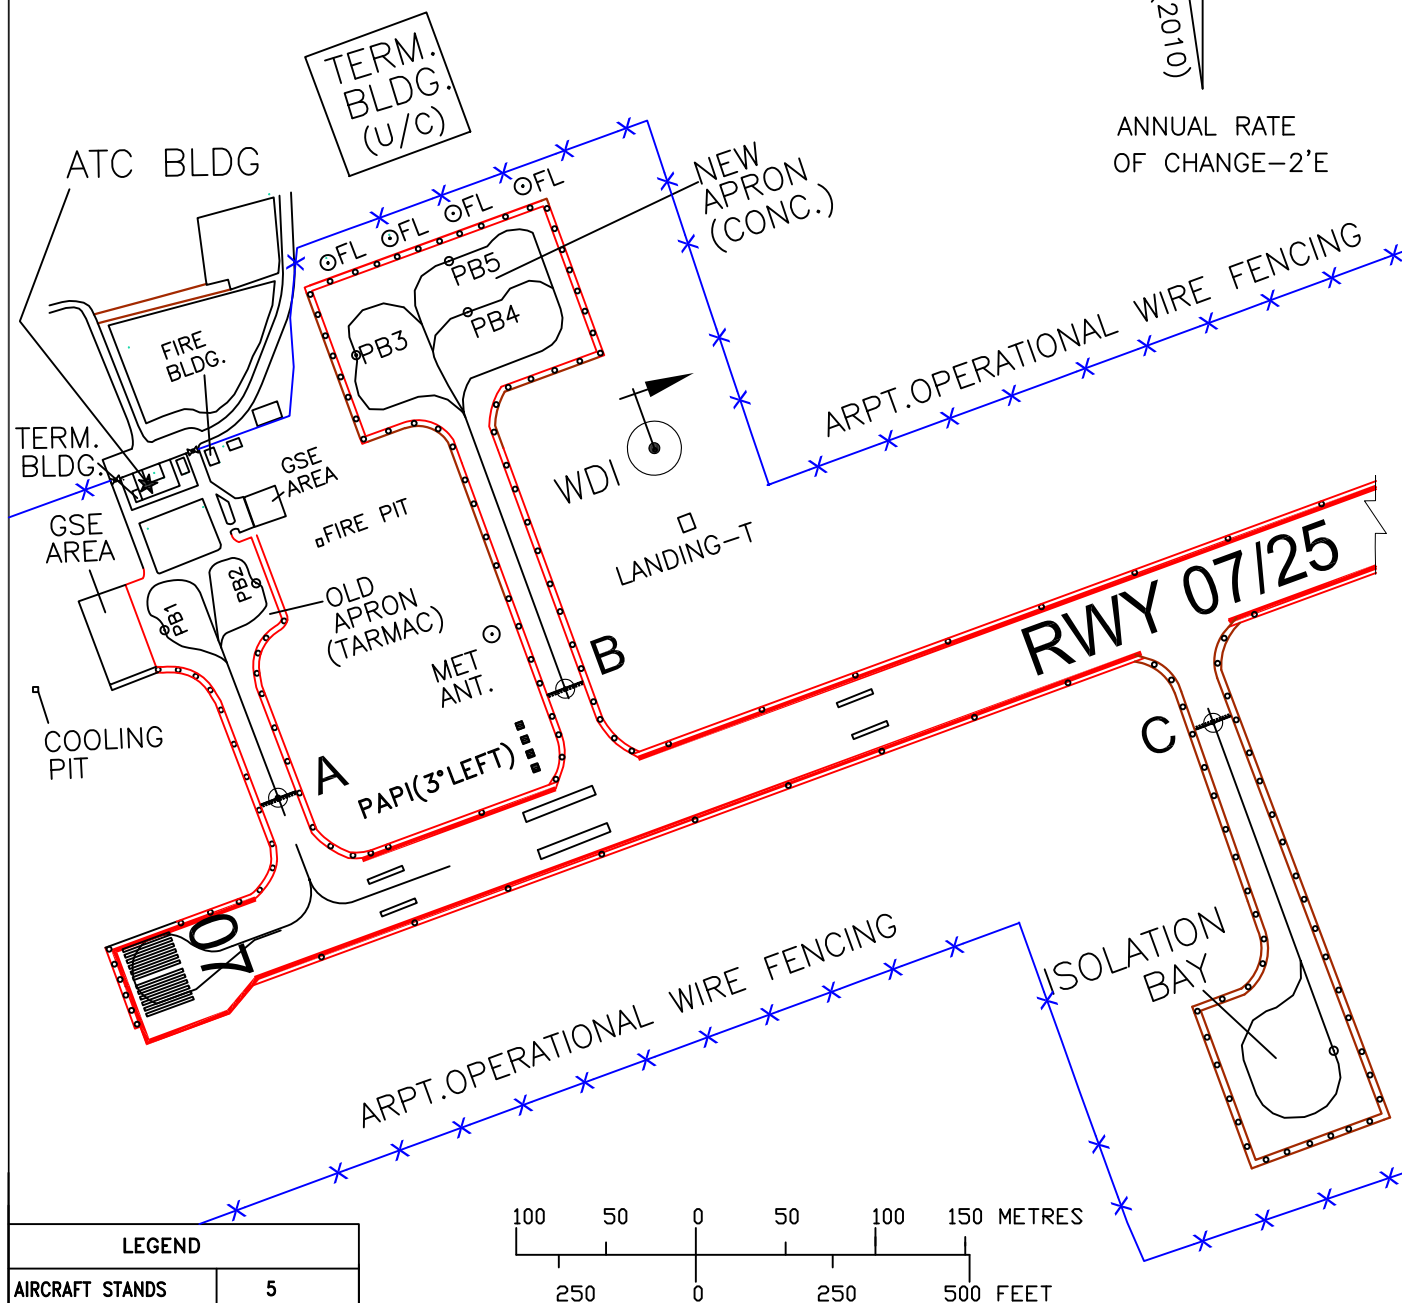
APRON ELEV. 2007ft.

TWR 126.900

KOLHAPUR, INDIA

KOLHAPUR AIRPORT

- * DATUM : HORIZONTAL WGS-84
: VERTICAL EGM-8
- * DIMENSIONS IN METRES
- * ELEVATION IN FEET(EGM-08)
- * BEARINGS ARE MAGNETIC

ANNUAL RATE
OF CHANGE-2'E

LEGEND	
AIRCRAFT STANDS	5
RWY HOLDING POINT	≡≡≡

PARKING STAND NO.	WGS CO-ORDINATES FOR AIRCRAFT STANDS	PCN	SUITABILITY OF AIRCRAFT	ELEV.	STATUS OF AIRCRAFT STAND
1	16°39'51.965"N 074°16'57.970"E	68/F/B/W/T	AT72	2007ft	Power in/power out
2	16°39'52.900"N 074°16'59.841"E	68/F/B/W/T	B190	2007ft	Power in/power out
3	16°39'57.383"N 074°17'01.859"E	64/R/B/W/T	A320	1992ft	Power in/power out
4	16°39'58.234"N 074°17'04.130"E	64/R/B/W/T	AT72	1991ft	Power in/power out
5	16°39'59.236"N 074°17'03.743"E	64/R/B/W/T	AT72	1991ft	Power in/power out
ISO. BAY	16°39'43.798"N 074°17'21.817"E	64/R/B/W/T	A320	1991ft	Power in/power out

TWY	PCN	WIDTH
A	64/F/B/W/T	25M
B	64/R/B/W/T	23M
C	64/R/B/W/T	23M

AERONAUTICAL INFORMATION UPTO JULY 2022

DRG.NO.-AAI/45-PDC/2022

(UPDATED AS ON 24.08.2022)