

AERODROME CHART

12°59'42.356"N
80°10'24.973"E
AD.ELEV. 54ft.

TWR 118.1
SMC 121.9

CHENNAI, INDIA
CHENNAI INTL. AIRPORT


RWY	DIRECTION	THR CO-ORDINATES	THR ELEV.(ft.)	BEARING STRENGTH
07	071°	12°59'02.93"N 080°09'10.58"E	43	105/F/C/W/T
25	251°	12°59'45.52"N 080°11'04.02"E	54	
12	119°	13°00'13.15"N 080°09'44.95"E	44	
30	299°	12°59'41.28"N 080°10'46.95"E	48	

FROM BEGINNING OF RWY 12 TO 960M : 85/R/B/W/T
FROM 960 OF RWY 12 TO 1010M : 89/F/C/W/T
FROM 1010 OF RWY 12 TO 1560M : 98/F/A/W/T
FROM 1560 OF RWY 12 TO 2890M : 89/F/C/W/T

HOT SPOT DETAILS	
HS1	INTERSECTION OF TWY "G" AND TWY "B"
HS2	INTERSECTION OF TWY "M" AND TWY "B"
HS3	INTERSECTION OF TWY "E" AND TWY "B"
HS4	INTERSECTION OF RWY 07/25 AND TWY "B"
HS5	INTERSECTION OF TWY "B" AND TWY "C" JUNCTION
HS6	INTERSECTION OF TWY "B", TWY "D" AND TWY "Z"

DECLARED DISTANCE (IN METRES)				
RWY	TORA	TODA	ASDA	LDA
07	3661	3814	3711	3661
25	3661	3866	3721	3661
12	2890	2890	2890	2110
30	2680	2680	2680	2680

LEGENDS	
DVOR CHECK POINT	
RWY-HOLDING POSITION	
INTERMEDIATE HOLDING POINT	

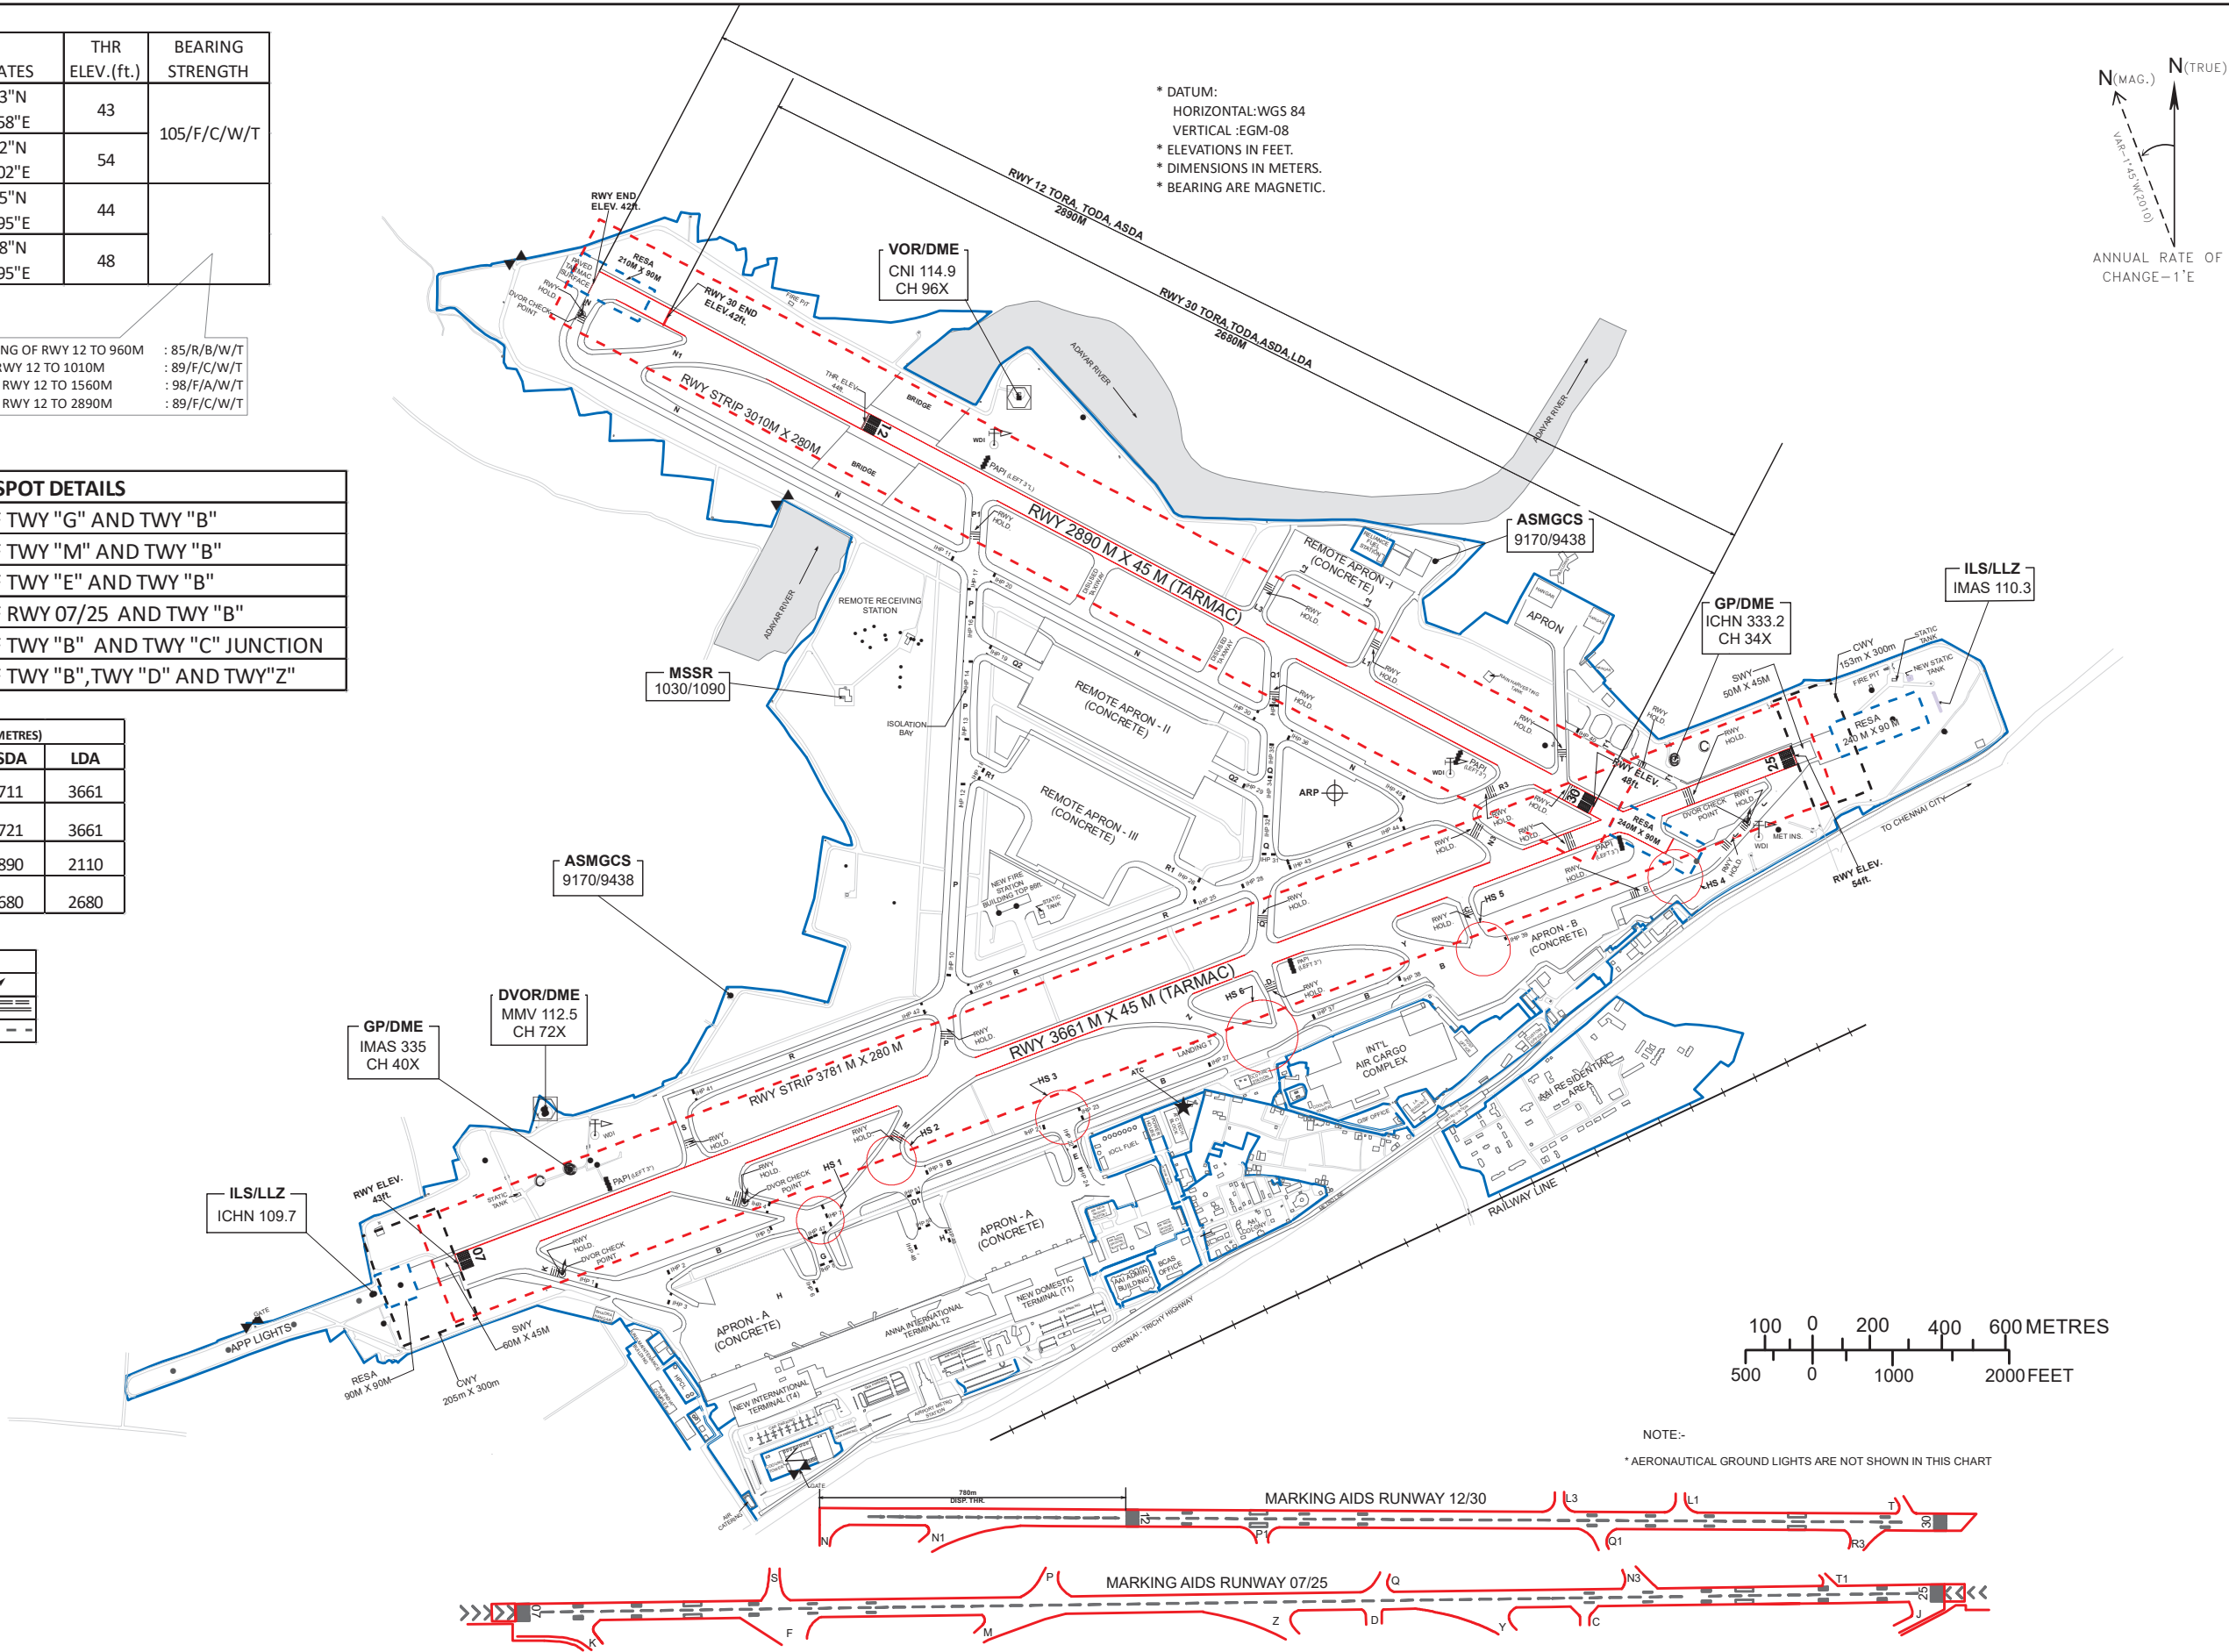

DATE OF AERONAUTICAL INFORMATION MARCH 2023

DWG No.AAI/34-AC/2022
(UPDATED AS ON 21-08-2023)