





AERODROME CHART

ARP 17°14'26"N  
078°25'44"E

ELEV. 2030FT

TWR 118.450MHz  
GND 121.850MHz

SHAMSHABAD(HYDERABAD), INDIA  
RAJIV GANDHI INTL. AIRPORT

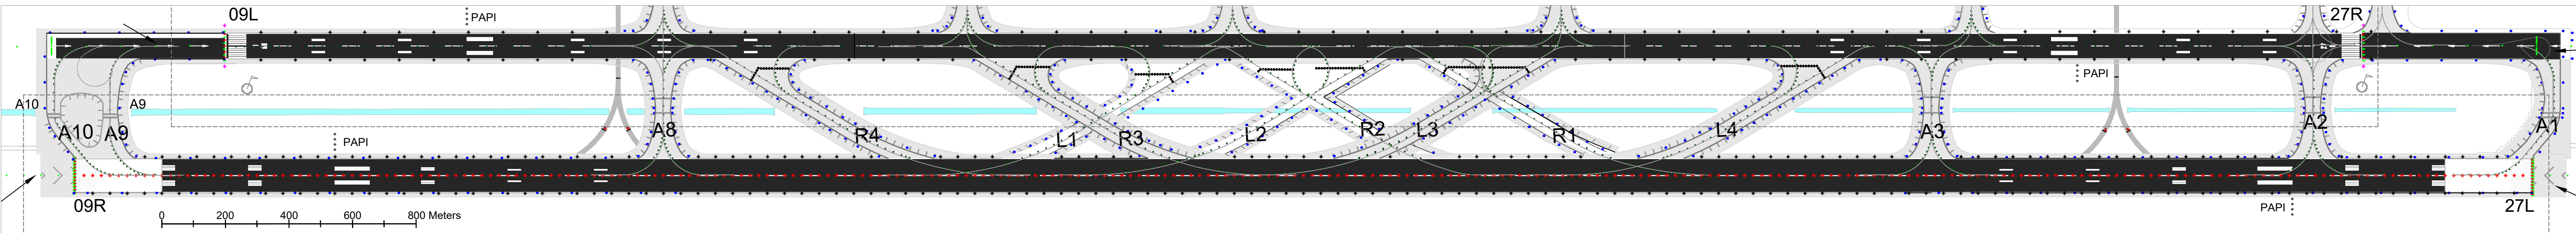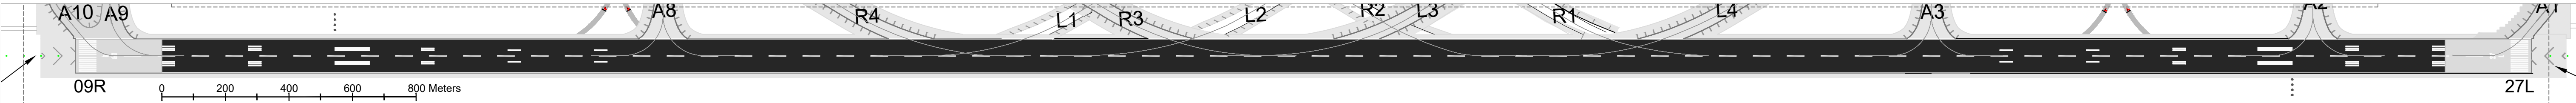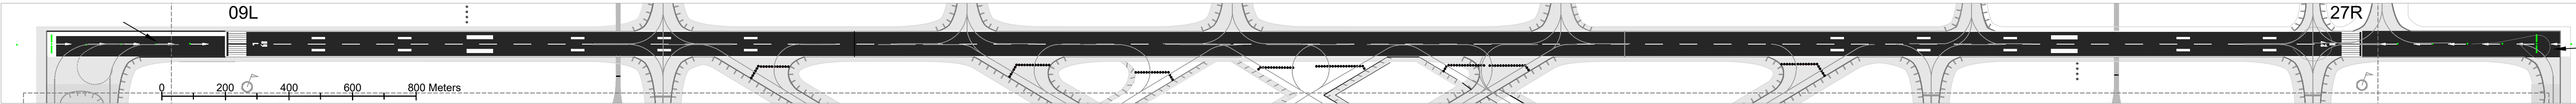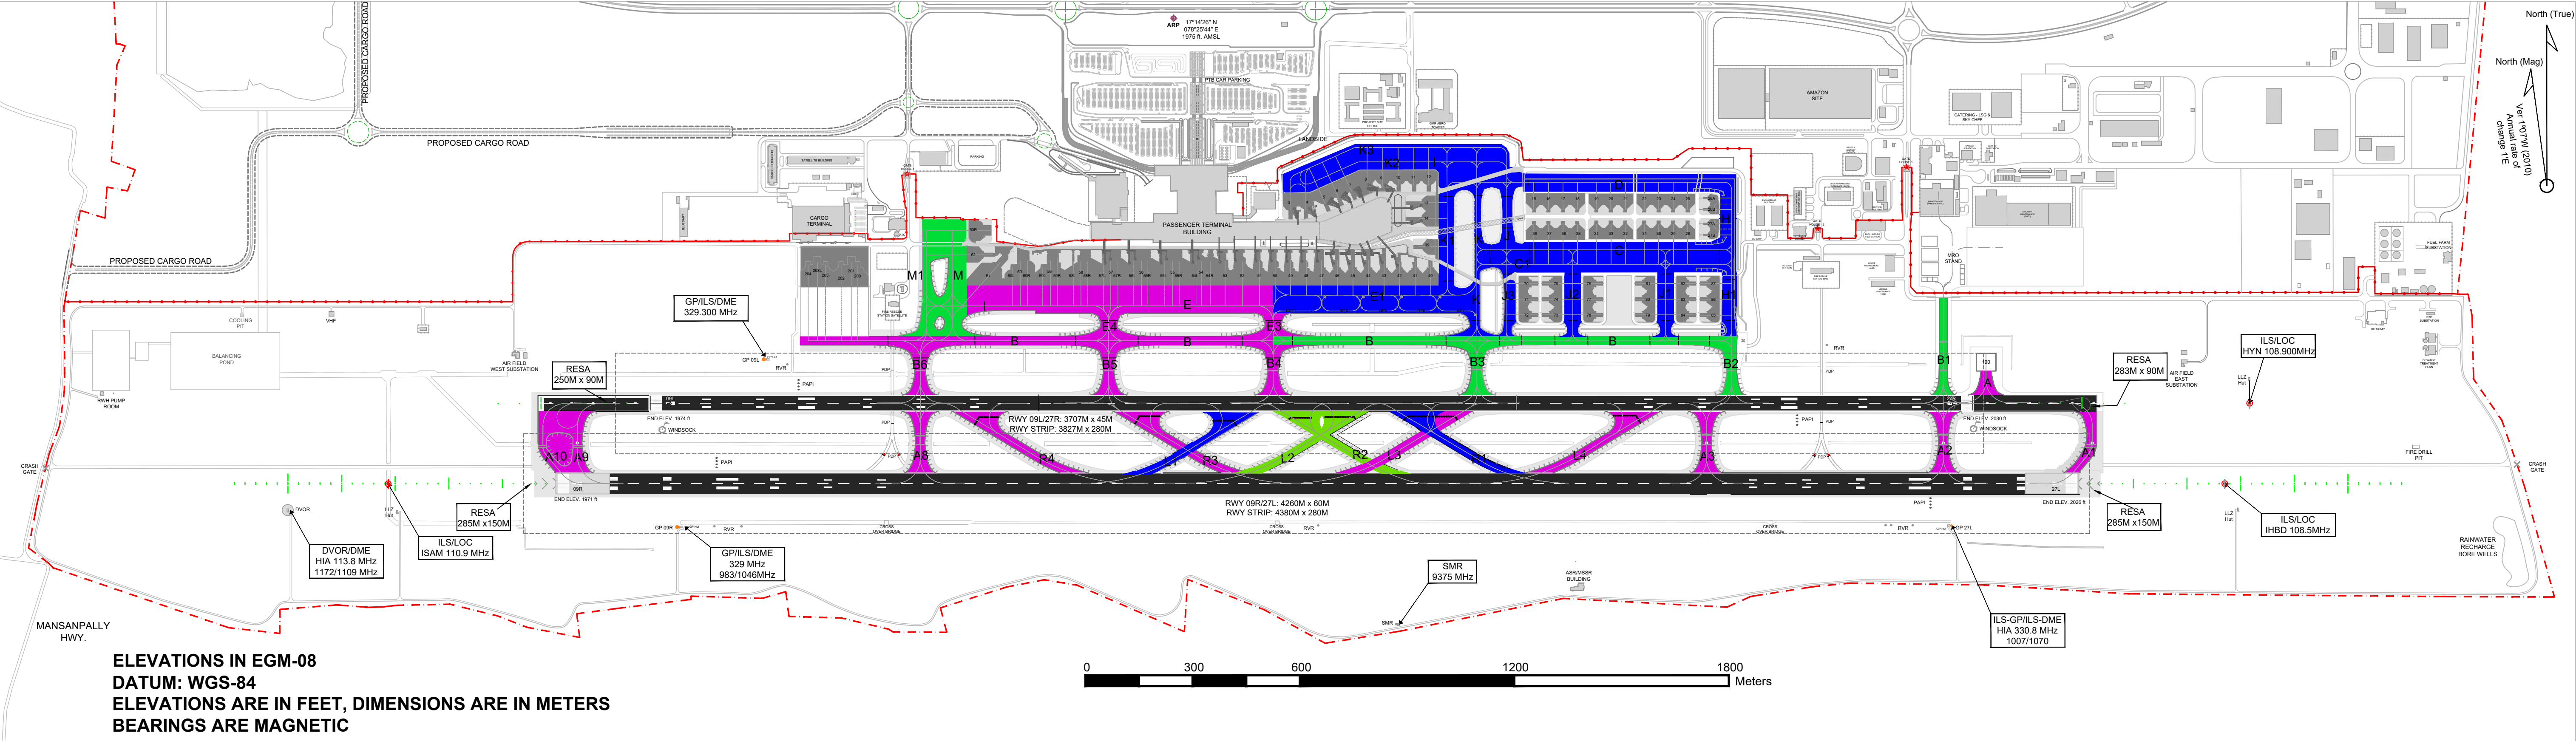

RWY	DIRECTION	THR COORDINATES	THR ELEV.	BEARING STRENGTH
09R	090°	17°13'42.91"N 078°24'46.11"E	1971 FT	88/R/C/W/T - First 150m both ends 77/F/B/W/T - Remaining
27L	270°	17°13'44.89"N 078°27'10.27"E	2026 FT	88/R/C/W/T - First 150m both ends 77/F/B/W/T - Remaining
09L	090°	17°13'50.35"N 078°24'54.80"E	1974 FT	77/F/B/W/T
27R	270°	17°13'52.08"N 078°27'00.25"E	2030 FT	77/F/B/W/T

RET	Type of Aircraft	Design Exit Speed
L1	CODE C	50 Kts
L2	CODE E	50 Kts
L3	CODE F	50 Kts
L4	CODE F	50 Kts
R1	CODE C	50 Kts
R2	CODE E	50 Kts
R3	CODE F	50 Kts
R4	CODE F	50 Kts

Symbol	Light	Colour
✱	RWY Centreline Light	White
✱	RWY TDZ Light	White
✱	RWY Edge Light	White
●	RWY Threshold Light	Green
●	RWY End Light	Red
✱	Threshold Identification Light	Flashing White
●	TWY Centreline Light	Green
●	TWY Edge Light	Blue

Legend
Blue TWY/Taxilane suitable for Aircraft upto ICAO Code C
Green TWY/Taxilane suitable for Aircraft upto ICAO Code E
Magenta TWY/Taxilane suitable for Aircraft upto ICAO Code F
Runway Pavement
Grey CONCRETE
Black ASPHALT
Dashed line Proposed/ Upcoming Infrastructure